

ACRO WUDSTAIN

Acro Wudstains are concentrated stains for wood with deep penetrative properties

DIRECTIONS FOR USE

- Sand the Wood / Veneer with 180 no. sand paper followed by 320 no. sand paper and clean.
- Apply **Acro Wudstain** with muslin cloth pad smoothly along with grains. Apply additional coats, with an intercoat interval of 5-10 min till desired shade is obtained.
- For lighter tone dilute the stain with adding good quality NC thinner and then apply.
- Allow to dry for 30 min before apply sealer coat.



- WUDSTAIN SURFACES MUST BE COATED WITH ACRO WUDCARE FINISHES
- DO NOT EXPOSE TO DIRECT SUNLIGHT



ACROWUDCARE
Interior/Exterior wood coating



ACRO WUDSEAL
Universal Sealer
For Wooden Surfaces



acro paints

Acro Paints Limited

Acro House, 5/3 Kirti Nagar Industrial Area, New Delhi-110015
Ph.: 011-43340000 (100 Lines), Toll Free : 1800-11-8880,
Fax : 011-25419683, 25410464, E-mail : acro@del2.vsnl.net.in
Website : www.acropaints.net, www.spanezia.com
CIN No. : U24119DL1989PLC036308



ISO 9001 : 2015
ISO 14001 : 2015
OHSAS 18001 : 2007

MAY 2018



acro paints

ACRO WUDSTAIN






WENGE



WALNUT




TEAK

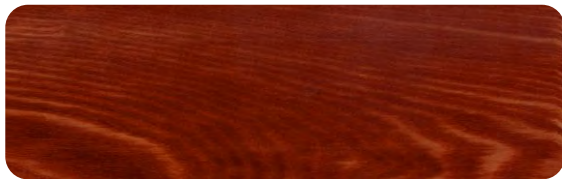

RED BROWN

● Shades shown are for indication purpose only.

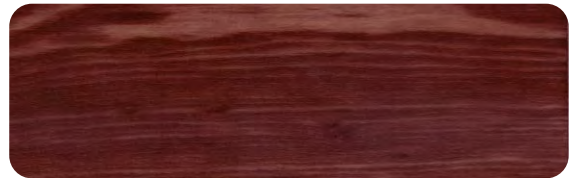

ROSE WOOD



OAK YELLOW

ACRO WUDSTAIN