

Acro Crack Seal Paste


Crack Filling & Smoothing Paste



acro paints



ISO 9001 : 2015
ISO 14001 : 2015
OHSAS 18001 : 2007

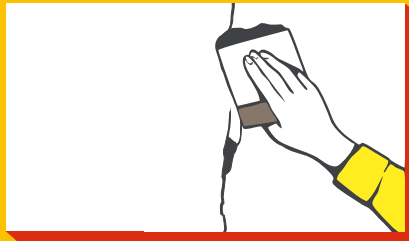

- Fibre-Reinforced For High Stability
- Weatherproof And Moisture-Resistant
- Hardens Crack-Free
- Can Be Sanded
- Versatile

Acro Crack Seal Paste

Crack Filling & Smoothing Paste

Directions for use:

Ensure that the surface must be sound & clean and free from dirt, dust, oil, grease and all loose particles that might hamper the bonding. Dampen the surface before application of Acro Crack Seal Paste for proper adhesion. All the hairline cracks must be widened upto 1mm by using scrapper. For application of Acro Crack Seal Paste on internal surface where POP exists, the same must be removed upto the surface of plaster.

Acro Crack Seal Paste requires no premixing. Use the material directly from the container. Place Acro Crack Seal Paste directly into the damp cracks with a spatula or putty knife and level the surface. Wherever widening of cracks is not possible, thin Crack Seal Paste by mixing with potable water and apply to enable penetration.

For deeper cracks, or if shrinkage or sinkage is observed, repeat the application till the cracks are levelled.

Self deceleration : Lead content does not exceed 90 PPM.



For product information, visit our website www.acropaints.net
For feedback / complaints, write to Technical Services Dept.,
Acro House, 5/3, Kirti Nagar Industrial Area, New Delhi-110015
Or Call 1800-11-8880

M.R.P.₹
(Incl. of all taxes)
Batch No. :
Date of Mfg.:



1 Kg. nett
No Added Lead,
Mercury & Chromium
(No Added Heavy Metals)



Manufactured By:
Acro Paints Limited
A-115A, Riico Industrial Area
Phase -1, Bhiwadi - 301019 (Rajasthan)
CIN No. : U24119DL1989PLC036308

